



KYLO PENDANT

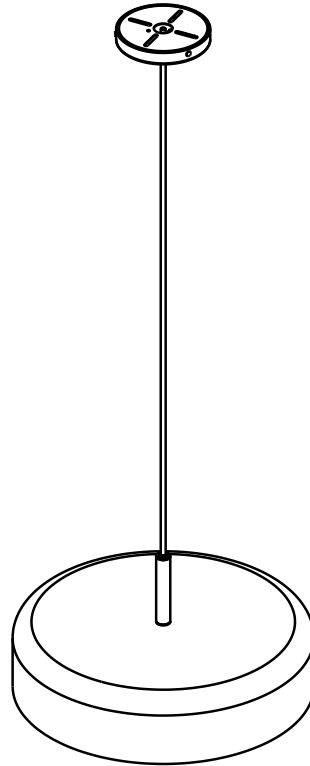

CAUTION

- It is strongly recommended that the hardwire installation of this product is done by a professional.
- Read these safety instructions entirely prior to installation.
- DO NOT BEGIN INSTALLATION UNTIL ALL ELECTRICAL POWER TO THE INSTALLATION SITE HAS BEEN TURNED OFF AT THE CIRCUIT BREAKER!



ATTENTION: If you do not have an existing electrical junction box in your intended installation site, have one installed by a licensed electrician.

Recommended Tools:

- Philips screwdriver
- Marker
- Electrical tape
- Plain and long-nose pliers
- Tall step ladder
- Tape measure
- Wire stripper
- Wire nuts

This Product Includes

- Kylo pendant
- Acrylic diffuser
- R&B dimmable LED bulbs (2)
- Thumb screws (3)
- Canopy mounting plate
- Canopy cover

Installation Instructions

Cut power to circuit prior to beginning installation.

We recommend completing this installation with another person.

- 1 Remove the 3 thumb screws holding the canopy cover to the canopy mounting plate and separate the canopy mounting plate from the canopy cover.
- 2 Determine the desired mounting height of the pendant. Feed the pendant cord through the canopy cover and adjust the pendant height by loosening the cord clamp and pulling the cord through it. Then tighten the cord clamp with a Phillips head screwdriver. Trim excess pendant wiring as needed, keeping at least 6 inches for wiring. Carefully cut the pendant cord with a box cutter and strip the wires with a wirestripper, exposing a quarter inch of metal wire.

SPECIAL CONSIDERATIONS: When choosing the proper length of the pendant cord, we recommend a minimum of 22" between tables or eating surfaces and the bottom of the pendant.

- 3 Hold the canopy mounting plate by your junction box and feed the supply wires through the center hole of the canopy mounting plate, and secure the canopy mounting plate to the junction box with the junction box's hardware.
- 4 Connect the Green, White, and Black fixture wires to corresponding wires in the junction box using wire nuts.
- 5 Lift the pendant into place, tuck the wires into the cover, and secure the canopy cover to the canopy mounting plate with the 3 provided thumb screws.
- 6 Remove diffuser by unscrewing the finial. Screw in two bulbs and put the diffuser back in place.

